


FAB102 Quick Manual

2 Slot ATX –Support PICMG1.3 Bus Passive Backplane with PCIe(16)

II.Connector

| Connector | Description |
|-----------|--------------------------------|
| SSHB 1~4 | For PICMG 1.3 Full-Sized SBC |
| PCIEA1 | For Additional PCIe16 VGA card |
| SCN1 | 8 Pin Power Connector |
| SPWR_BT1 | Power Button |
| SHW_RST1 | Hardware Reset |
| ATX1 | 24 Pin ATX Power Connector |

■ 8 Pin Power Connector–CN1

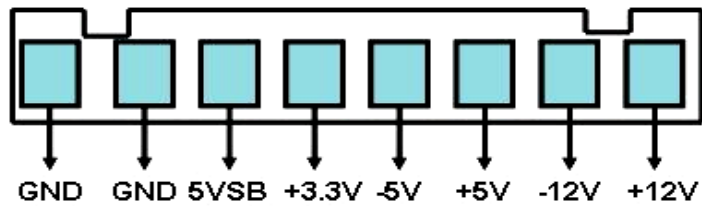


Notice:The 8 Pin Power connector could be used for Thermal Detected Board(For example.The AX8295A)


FAB102 Quick Manual

2 Slot ATX-Support PICMG 1.3 Bus Passive Backplane with PCIe(16)

- SPWR_BT1 Connector




- SHW_RST1 Connector



FAB102 Quick Manual

2 Slot ATX –Support PICMG1.3 Bus Passive Backplane with PCIe(16)

■ 24-pin ATX Power Connector

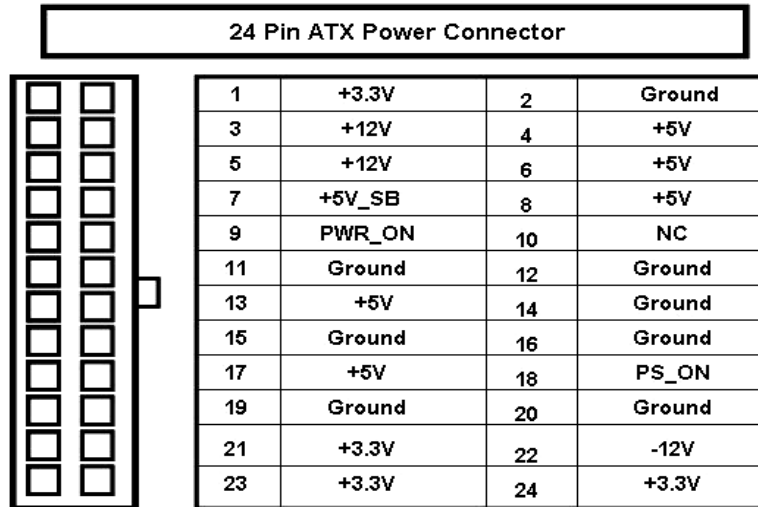

Notice:The onboard 24 pin power connector also back compatible with 20 pin power supply

©Copyright 2001 by AXIOM Technology Co., Ltd.

All rights reserved.

April 2007, Version A1

Printed in Taiwan

9419B102010E

Trademarks Acknowledgments

AXIOM is a trademark of AXIOM Technology Co., Ltd.

Other brand names and trademarks are the properties and registered brands of their respective owners.

Specifications are subject to change without notice.