# **Features**

- Desktop or wallmount industrial computer chassis
- One 5.25" and two 3.5" HDD drive bays
- Equipped with a PS/2 type power supply





Equipped with a power supply bracket securing the power supply better when the chassis is positioned in 90° orientation

#### **Specifications**

Standard Color	Beige	
Construction	Heavy-duty steel	
Drive Capacity	Exposed 1 x 5.25" HDD drive bay 1 x 3.5" HDD drive bay	
	Internal 1 x 3.5" HDD drive bay	
Cooling	1 x 9 cm ball-bearing fan (51 CFM/each) with a removable filter	
Front Panel Indicators	1 x Power on/off	
Front Panel Controls	1 x Power on/off 1 x System reset	
Front Panel Connector	1 x PS/2 6-pin keyboard & mouse 2 x USB	
System Board	SBCs	
Expansion Interface	6-slot backplane	
Operating Temperature	0°C to +40°C (+32°F to +104°F)	
Dimensions	240.2 mm (9.45") (W) x 401.4 mm (15.8") (D) x 154.7 mm (6.1") (H)	
Weight (net/gross)	9 kg (19.84 lb)/10.3 kg (22.7 lb)	

# **Power Supply Specifications**

Items	Watt	Specifications		
	vvall	Input	Output	MTBF
PS302- XP2	ATX 300W (PFC)	AC 100 to 240V (Auto)	+5V @ 16A +12V1 @ 17A +12V2 @ 17A -12V @ 0.3A +3.3V @ 19A +5VSR @ 2.5A	100,000 hours

## **Ordering Information**

AX60501WB/X300	6-slot shoebox chassis with ATX 300W power supply
AX60501WB/X400	6-slot shoebox chassis with ATX 400W power supply
AX60501WB/X500	6-slot shoebox chassis with ATX 500W power supply

<sup>\*</sup>Specifications and certifications are based on options and may vary.

## **Backplane Options**

#### PICMG 1.0

Models	Slots per Segment (ISA/PCI/PCIe/CPU)	Segment
ATX6022/6	1/4/0/1	Single


#### PICMG 1.3

Models	Slots per Segment (ISA/PCI/PCIe/CPU)	Segment
FAB105	0/3/1/1	Single
FAB109	0/0/4/1	Single
FAB110	0/2/2/1	Single
HAB206	0/3/1/1	Single

#### **Optional Items**

ATX 400W power supply with PFC ATX 500W power supply with PFC

## **Dimensions**

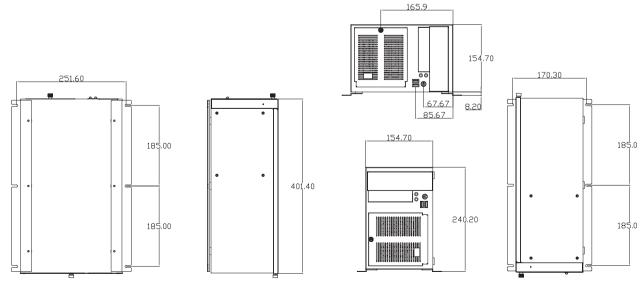

5

*b*