

tBOX322-882-FL Quick Installation Guide

Step 3 Slide CFast card into slot cautiously



Step 4 Fasten screws of HDD/CFast bracket

Installing the HDMI bracket

Step 1 Fasten the bracket at the position as shown.



Step 2 Connect HDMI cable and tied on bracket by cable tie as shown.





Checklist

- ✓ tBOX322-882-FL System Unit x 1
- ✓ Quick Installation Guide x 1
- ✓ Screws Pack x 1
- ✓ Wallmount Bracket x 1
- ✓ HDMI bracket x 1
- ✓ Optional Mini Card Module
- ✓ Optional M12 power cable
- ✓ Optional remote switch cable
- ✓ CD x 1 (for Driver & Manual)
- ✓ Foot Pad x4
- ✓ DIO & Serial connector
- ✓ Key x2
- ✓ Cable tie x2
- ✓ Optional HDD/SSD
- ✓ Optional CFast Card
- ✓ Optional M12 LAN cable(s)

Note: Please contact your local vendors if any damaged or missing items. **DO NOT** apply power to the board if there is any damaged component.


Dimensions

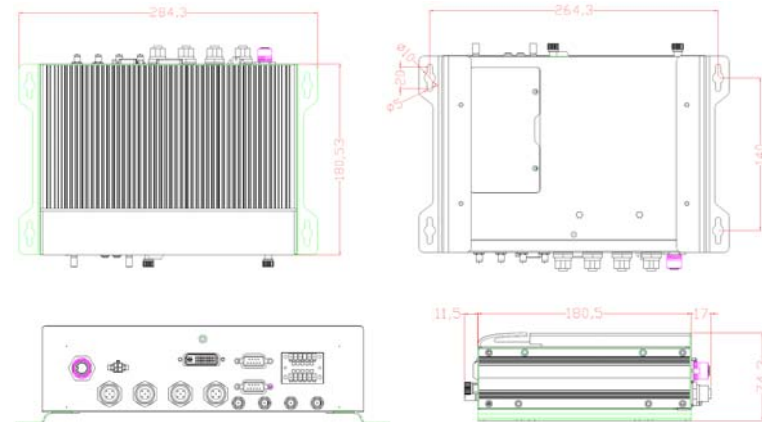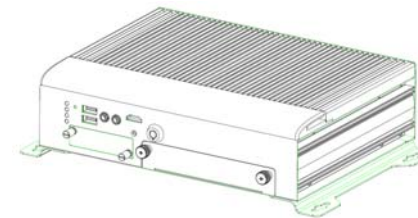

9416N322000E
©Copyright 2014 Axiomtek Co., Ltd.
Version A1 Oct 2014
Printed in Taiwan

I/O Outlets

The following figures show you I/O outlets on front and rear panels of the tBOX322-882-FL Series.

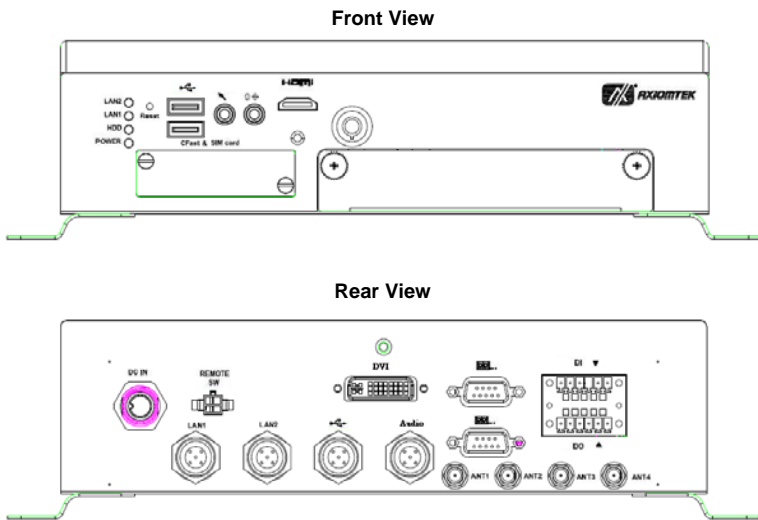

Installing the PCI Express Mini Card and SIM Card

Step 1 Turn off the system, and unplug the power cord.

Step 2 Turn the system upside down to locate screws at the bottom, loosen screws to remove the bottom cover.



Step 3 Slide Mini card into slot cautiously



Step 4 Slide SIM card into slot cautiously.



Step 5 Close the cover to the chassis, and fasten all screws.

Installing the swappable HDD/SSD and CFast Card

Step 1 Turn off the system, and unplug the power cord. Unlock screws counterclockwise on the front side as shown.



Step 2 Assemble the HDD/SSD bracket together with the SATA HDD/SSD, then fasten the screws on the both side.

